


## HOT MULTIFORM BLACK 20

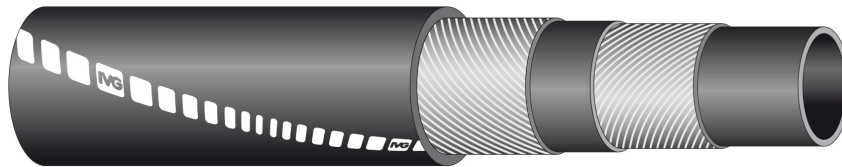

### Extruded hose for hot water and non aggressive fluids

**Application:** designed to convey hot water, fluids even slightly acidic and non aggressive in chemical industries.

**Temperature:** from -40°C (-40°F) to +120°C (+248°F).









**Construction**

**Tube:** black, seamless EPDM rubber compound.

**Reinforcement:** high strength synthetic fabrics.

**Cover:** black, seamless, ageing, ozone, weathering-resistant, EPDM rubber compound.

**Branding:** IVG RUBBER HOSE MULTIFORM BLACK 20 BAR W.P. TEMP. 120°C (+248°F) - SIZE - BATCH NUMBER.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
														
1447599	6	17/72	14	0,55	20	300	60	900	0,16	0,11	60	2,4	100	328
1447602	7	8/29	16	0,63	20	300	60	900	0,20	0,13	60	2,4	100	328
1447610	8	5/16	17	0,67	20	300	60	900	0,21	0,14	65	2,6	100	328
1447629	10	25/64	19	0,75	20	300	60	900	0,24	0,16	80	3,2	100	328
1447637	13	1/2	23	0,91	20	300	60	900	0,34	0,23	105	4,1	60	200
1448137	13	1/2	21	0,83	20	300	60	900	0,26	0,18	105	4,1	60	200
1448080	16	5/8	25	0,99	20	300	60	900	0,36	0,24	130	5,1	60	200
1448099	19	3/4	29	1,14	20	300	60	900	0,47	0,31	150	5,9	60	200
1447653	19	3/4	30	1,18	20	300	60	900	0,50	0,34	150	5,9	60	200