




**PREMIER
HOSE
TECHNOLOGIES**

AIR WATER 20

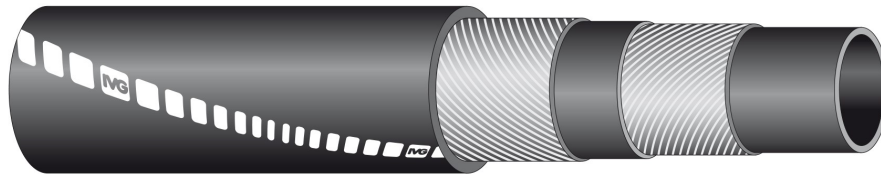

Extruded hose for air and water

Application: designed for compressed air, to convey water and non-aggressive fluids in various industrial and agricultural applications.

Temperature: from -25 °C (-13 °F) to +80 °C (+176 °F).









Construction

Tube: black, seamless synthetic rubber compound.

Reinforcement: high strength synthetic fabrics.

Cover: black, abrasion, ageing, ozone and weather-resistant, seamless synthetic rubber compound.

Branding: IVG RUBBER HOSE AIR- WATER 20 BAR W.P. SIZE - BATCH NUMBER.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
														
1447432	6	17/72	14	0,55	20	300	60	900	0,16	0,11	60	2,4	100	328
1447440	7	8/29	16	0,63	20	300	60	900	0,22	0,15	60	2,4	100	328
1447459	8	5/16	17	0,67	20	300	60	900	0,22	0,15	65	2,6	100	328
1447467	10	25/64	19	0,75	20	300	60	900	0,26	0,17	80	3,2	100	328
1447475	13	1/2	23	0,91	20	300	60	900	0,36	0,24	105	4,1	60	200
1447483	16	5/8	26	1,02	20	300	60	900	0,42	0,28	130	5,1	60	200
1447491	19	3/4	30	1,18	20	300	60	900	0,54	0,36	150	5,9	60	200
1447505	25	1	37	1,46	20	300	60	900	0,74	0,50	200	7,9	40	131

IVG ivg colbachini spa
