


HOT MAX

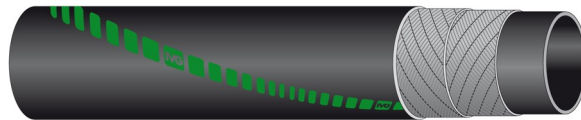

Hot water discharge hose

Application: softwall hot water discharge hose, for water that is even slightly acidic, suitable also for non corrosive fluids in numerous applications in chemical industries. See IVG chemical resistance chart.

Temperature: from -40°C (-40°F) to +120°C (+248°F).

Construction

Tube: black, smooth, EPDM rubber.

Reinforcement: high strength synthetic cord.

Cover: black, smooth, (wrapped finish) EPDM rubber, heat, weathering, and ozone resistant.

Branding: continuous green stripe “IVG HOT (family logo)...”.

Also available upon request: 1.Different diameters 2.Hose cover in different colours 3.Different working pressures.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1192477	10	25/64	20	0,79	10	150	30	450	0,31	0,21	120	400
1177818	12	15/32	22	0,87	10	150	30	450	0,35	0,23	120	400
1282093	13	1/2	20	0,79	10	150	30	450	0,22	0,15	120	400
1177494	15	19/32	25	0,99	10	150	30	450	0,41	0,27	120	400
1193201	16	5/8	26	1,02	10	150	30	450	0,43	0,29	120	400
1186787	18	23/32	28	1,10	10	150	30	450	0,47	0,32	120	400
1048147	19	3/4	27	1,06	10	150	30	450	0,33	0,22	120	400
1177826	20	35/32	30	1,18	10	150	30	450	0,51	0,34	120	400
1177834	25	1	35	1,38	10	150	30	450	0,61	0,41	120	400
1177540	30	1-3/16	41,5	1,64	10	150	30	450	0,82	0,55	120	400
1241320	32	1-1/4	43,5	1,71	10	150	30	450	0,86	0,58	120	400
1196804	38	1-1/2	50	1,97	10	150	30	450	1,06	0,71	120	400
1177460	45	1-49/64	61	2,40	10	150	30	450	1,66	1,12	120	400
1234315	51	2	65,5	2,58	10	150	30	450	1,66	1,11	120	400
1227670	63,5	2-1/2	78,5	3,09	10	150	30	450	1,94	1,31	120	400