


HOT MICHIGAN

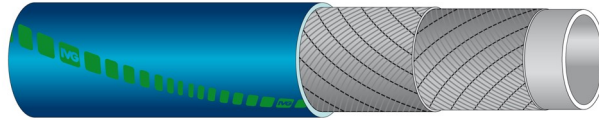

Hot water discharge hose

Application: softwall hot water discharge hose, for floor and equipment wash down in dairies, creameries, food processing plants and paper mills, etc.

Temperature: from -40°C (-40°F) to +80°C (+176°F).

Construction

Tube: white, smooth, SBR rubber.

Reinforcement: high strength synthetic cord.

Cover: blue, smooth, (wrapped finish) EPDM rubber, weathering and ozone resistant.

Branding: continuous green stripe “IVG HOT (family logo)...”.

Also available upon request: 1.Different diameters 2.White hose cover 3.Different working pressures.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1240609	13	1/2	23	0,91	10	150	30	450	0,37	0,25	120	400
1269119	16	5/8	25	0,99	10	150	30	450	0,37	0,25	120	400
1102087	19	3/4	28	1,10	10	150	30	450	0,42	0,28	120	400
1245520	25	1	36,5	1,44	10	150	30	450	0,70	0,47	120	400
1259237	32	1-1/4	46	1,81	10	150	30	450	1,08	0,72	120	400
1228544	38	1-1/2	54	2,13	10	150	30	450	1,44	0,97	120	400