


STEAM MANITOBA

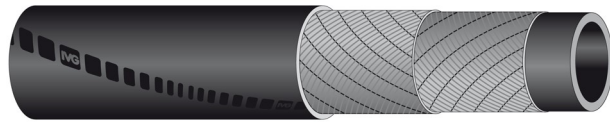

Steam hose for 165°C

Application: softwall steam hose, textile reinforced, recommended for use with saturated steam at a maximum working pressure of 6 bar (90 psi). For longer life drain after use.

Temperature: from -40°C (-40°F) to +165°C (+329°F).

Construction

Tube: black, smooth, EPDM rubber, resistant to saturated steam.

Reinforcement: high strength synthetic cord.

Cover: black, smooth (wrapped finish), EPDM rubber, resistant to high temperatures, weathering and ozone.

Branding: continuous embossed marking “IVG Steam Manitoba...”.

Also available upon request: 1. Different diameters 2. Cover in different colours.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1023799	10	25/64	21	0,83	6	90	60	900	0,28	0,19	120	400
1023829	12	15/32	23	0,91	6	90	60	900	0,32	0,22	120	400
1023837	13	1/2	23	0,91	6	90	60	900	0,29	0,19	120	400
1230697	16	5/8	27	1,06	6	90	60	900	0,39	0,26	120	400
1023926	19	3/4	29	1,14	6	90	60	900	0,39	0,26	120	400
1023934	19	3/4	31	1,22	6	90	60	900	0,50	0,34	120	400
1023993	25	1	37	1,46	6	90	60	900	0,59	0,39	120	400
1024043	30	1-3/16	45	1,77	6	90	60	900	0,87	0,58	120	400
1024051	32	1-1/4	46,5	1,83	6	90	60	900	0,89	0,59	120	400
1024108	38	1-1/2	54	2,13	6	90	60	900	1,17	0,78	120	400
1024370	51	2	68	2,68	6	90	60	900	1,63	1,10	120	400