


WATER OSLO 10

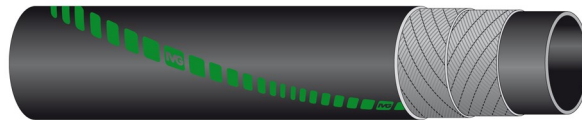

Lay flat water discharge hose

Application: lightweight and lay flat softwall hose, used for the discharge of industrial or waste waters in submerged pumps and in mobile irrigation systems.

Temperature: from -25°C (-13°F) to +70°C (+158°F).

Construction

Tube: black, smooth, synthetic rubber.

Reinforcement: high strength synthetic cord.

Cover: black, smooth (wrapped finish), synthetic rubber, weathering and ozone resistant.

Branding: continuous green stripe "IVG Water (family logo)...".

Also available upon request: 1.Different diameters 2.Cover in different colours 3.Different working pressures.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1029053	30	1-3/19	36,5	1,44	10	150	30	450	0,42	0,28	120	400
1029096	40	1-37/64	46	1,81	10	150	30	450	0,50	0,34	120	400
1029134	45	1-49/64	51	2,01	10	150	30	450	0,56	0,38	120	400
1070843	51	2	57	2,25	10	150	30	450	0,63	0,42	120	400
1070932	60	2-3/8	66	2,60	10	150	30	450	0,74	0,50	120	400
1096974	76	3	82	3,23	10	150	30	450	0,93	0,63	120	400
1029304	80	3-5/32	87	3,43	10	150	30	450	1,07	0,72	120	400
1029371	102	4	109	4,29	10	150	30	450	1,31	0,88	120	400
1357468	127	5	135	5,32	10	150	30	450	1,91	1,28	120	400
1386832	152	6	159	6,26	10	150	30	450	2,04	1,37	120	400
1093754	203	8	213	8,39	10	150	30	450	3,66	2,46	60	200
1093746	254	10	265,5	10,46	10	150	30	450	5,15	3,46	60	200